




# Environmental Product Declaration

according to ISO 14025

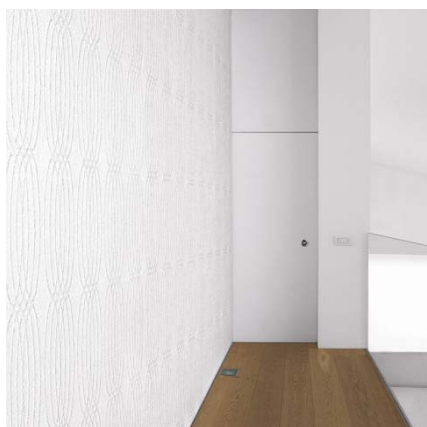

**Wall and ceiling coverings  
made of glass yarns**

**Vitrulan Textile Glass GmbH**


Declaration number  
EPD-VIT-2010111-E

Institute Construction and Environment e.V. (IBU)  
[www.bau-umwelt.com](http://www.bau-umwelt.com)



Institut Bauen  
und Umwelt e.V.

	<b>Brief version Umwelt- Produktdeklaration <i>Environmental Product Declaration</i></b>
---	--

<b>Institute Construction and Environment e.V. (IBU)</b> <a href="http://www.bau-umwelt.com">www.bau-umwelt.com</a>		<b>Programme holder</b>
--	--	-------------------------

<b>Vitrulan Textile Glass GmbH</b> <b>Bernecker Str. 8</b> <b>D-95509 Marktschorgast</b>		<b>Declaration holder</b>
--	--	---------------------------


<b>EPD-VIT-2010111-E</b>	<b>Declaration number</b>
--------------------------	---------------------------

<b>Wall and ceiling coverings made of glass yarns</b> <p>This Declaration is an Environmental Product Declaration in accordance with ISO 14025 and describes the environmental features of the construction products outlined here. It intends to promote the development of construction which is compatible with the environment and health. This validated Declaration discloses all of the relevant environmental data. This Declaration is based on the PCR "Glass wall and ceiling coverings" document, 2010 (PCR 2010/).</p>	<b>Declared construction products</b>
--	---------------------------------------



<p>This validated Declaration entitles the holder to bear the symbol of the Institut Bauen und Umwelt e.V. It exclusively applies for the products referred to for a period of three years from the date of issue. The Declaration holder is liable for the details and documentation upon which the evaluation is based.</p>	<b>Validity</b>
---	-----------------

<p>The Declaration is complete and comprises in detail:</p> <ul style="list-style-type: none"> <li>• Product definition and physical construction data</li> <li>• Details on base materials and material origin</li> <li>• Description of the product manufacturing process</li> <li>• Information on product processing</li> <li>• Data on the utilisation status, extraordinary effects and re-use phase</li> <li>• Results of the Life Cycle Assessment</li> <li>• Documentation and tests</li> </ul>	<b>Content of the Declaration</b>
--	-----------------------------------

<b>1 October 2010</b>	<b>Issue date</b>
-----------------------	-------------------

	<b>Signatures</b>
<small>Prof. Dr.-Ing. Horst J. Bossenmayer (President of Institut Bauen und Umwelt)</small>	

<p>This Declaration and the regulations upon which it is based have been tested by the independent Committee of Experts (SVA) in line with ISO 14025.</p>	<b>Testing the Declaration</b>
---	--------------------------------

		<b>Signatures</b>
<small>Prof. Dr.-Ing. Hans-Wolf Reinhardt (Chairman of the SVA)</small>	<small>Dr. Frank Werner (tester appointed by the SVA)</small>	



**Brief version  
Umwelt-  
Produktdeklaration  
Environmental  
Product Declaration**

Wall and ceiling coverings made of glass yarns are structured, patterned or practically smooth fabrics comprising glass yarns arranged vertically and horizontally, usually with a fixed non-slip finish based on starch and plastic.

**Product description**

The products outlined here are exclusively used as functional and decorative wall and ceiling coverings in interior applications.

**Area of application**

**Areas of application:**

<b>Representation areas</b>	e.g. company buildings / public buildings / catering trade / sales area
<b>Play and learning areas</b>	e.g. kindergartens / crèches / schools / colleges
<b>Residential applications</b>	e.g. private accommodation / rented accommodation / social housing
<b>Wet areas</b>	e.g. indoor swimming pools / spa centres / private bathrooms
<b>Hygiene areas</b>	e.g. doctors' surgeries / hospitals / laboratories / OP areas / intensive care / nursing homes
<b>Production areas</b>	e.g. bakeries / abattoirs / industrial kitchens

The **Life Cycle Assessment** has been performed in accordance with DIN EN ISO 14040 and DIN EN ISO 14044, the requirements of the IBU Guidelines as regards Type III Declarations and the specific rules governing wall and ceiling coverings made of glass yarns. Specific plant data on the products tested as well as data from the "GaBi 4" data base was applied. The Life Cycle Assessment comprises the life cycle stages of raw material and energy exploitation, raw material transport and the actual manufacture of wall and ceiling coverings made of glass yarns, including the manufacture and disposal of packaging.

**Life Cycle Assessment  
framework**

<b>Wall and ceiling coverings made of glass yarns</b>		
Analysis factor	Unit per declared unit	Product
Non-regenerative primary energy	[MJ]	11.26
Regenerative primary energy	[MJ]	0.82
Global warming potential (GWP 100 years)	[kg CO <sub>2</sub> equiv.]	6.46E-01
Ozone depletion potential (ODP)	[kg R11 equiv.]	5.07E-08
Acidification potential (AP)	[kg SO <sub>2</sub> equiv.]	3.59E-03
Overfertilisation potential (NP)	[kg PO <sub>4</sub> <sup>3-</sup> equiv.]	1.92E-04
Photochemical ozone creation potential (POCP)	[kg C <sub>2</sub> H <sub>4</sub> equiv.]	1.67E-04

**Results of the  
Life Cycle Assessment**

Created by: Vitrolan Textile Glass GmbH, Marktschorgast in co-operation with PE INTERNATIONAL, Leinfelden-Echterdingen



Documentation and tests in accordance with PCR:  
 \* ÖkoTex Standard 100: "Textiles Vertrauen – Schadstoffgeprüfte Textilien nach Öko-Tex Standard 100" (Confidence in Textiles - Tested for harmful substances according to Öko-Tex Standard 100) Hohenstein Textile Testing Institute GmbH & Co.KG, Hohenstein  
 \* Testing toxic combustion gases as per DIN 53436, Elektro-Physik Aachen GmbH (epa Aachen), Aachen

**Documentation  
and tests**



Product group: Glass wall and ceiling covering  
 Declaration holder: Vitrulan Textile Glass GmbH  
 Declaration number: EPD-VIT-2010111-E

Created  
 01-10-2010

**Area of applicability** This document refers to wall and ceiling coverings made of glass fibres. The Life Cycle Assessment data was recorded in 2009 by Vitrulan Textile Glass GmbH in Marktschorgast, Germany.

**1 Product definition**

**Product definition** Wall and ceiling coverings made of glass yarns are structured, patterned or practically smooth fabrics comprising glass yarns arranged vertically and horizontally, usually with a fixed non-slip finish based on starch and plastic. They are used for both functional and decorative purposes.

**Application** The products referred to here are exclusively used in interior applications as wall and ceiling coverings. Thanks to their variety of design and elegant appearance, they can be used for both decorative purposes and multiple functional purposes, e.g. anti-crack reinforcement in plaster and drywall construction as well as for bridging cracks. Owing to their resistance to impact and piercing, abrasion, disinfectant and cleaning agents, water vapour permeability, fire safety, compatibility in terms of harmful substances and foodstuffs as well as suitability for allergy sufferers, these coverings can also be used in applications with high requirements on hygiene, for example.

**Placing on the market / Application rules** On the basis of the current state of the art, there are no rules governing placing wall and ceiling coverings made of glass yarns on the market.

**Quality assurance** Internal monitoring:  
 Development, manufacture and distribution of functional and decorative glass wall and ceiling coverings under application of a Quality Management System in accordance with DIN EN ISO 9001:2008 (ISO 9001)

External monitoring / annually:  
 In accordance with the framework conditions governing the "Öko-Tex® Standard 100"

External monitoring / every 5 years:  
 In accordance with the framework conditions governing "Fire testing"

**Delivery status, Features**

Weight [g/m <sup>2</sup> ]	35.00 to 350.00
Roll length [m]	10.00 to 50.00 + 0.2
Roll width [cm]	100.00 ± 0.1
Thickness [mm]	0.30 to 1.20

**Technical construction data (thermal protection, moisture protection etc.)** The physical variables of wall and ceiling coverings made of glass yarns are not based on the corresponding approvals, supplier specifications or values specified in other guidelines.

The following values are tested in-house:  
 - Tear resistance to ISO 13934-1  
 - Elongation on breaking load as per ISO 13934-1

**Table 1: Technical data (tear resistance and elongation)**

Fabric	Tear resistance			
Standard fabric	Warp <sub>min</sub>	380 N/5cm	Weft <sub>min</sub>	330 N/5cm
	Warp <sub>max</sub>	2720 N/5cm	Weft <sub>max</sub>	2010 N/5cm
Fabric	Elongation			
Standard fabric	Warp <sub>min</sub>	1.40%	Weft <sub>min</sub>	1.40%
	Warp <sub>max</sub>	3.80%	Weft <sub>max</sub>	4.50%



Product group: Glass wall and ceiling covering  
 Declaration holder: Vitrolan Textile Glass GmbH  
 Declaration number: EPD-VIT-2010111-E

Created  
 01-10-2010

**Fire protection** Building material classification in accordance with DIN EN 13501-1:2007 (DIN EN 13501-1) or applicable national regulation: Class B-s1, d0

**2 Base materials**

**Base materials, Primary products** Glass:  
 The exact mixture composition for manufacturing C- and E-glass depends on the composition of the individual raw glass materials.  
 Typical components of C- and E-glass are:

**Table 2: Components of C- and E-glass**

<b>Components</b>	<b>C-glass</b>	<b>E-glass</b>
SiO <sub>2</sub>	60.5 – 62.5	53.0 – 57.0
Al <sub>2</sub> O <sub>3</sub>	3.8 – 5.0	12.0 – 15.0
CaO + MgO	6.0 – 11.0	22.0 – 26.0
B <sub>2</sub> O <sub>3</sub>	4.0 – 6.0	5.0 – 8.0
F <sub>2</sub>	0.0 – 0.6	0.0 – 0.6
Na <sub>2</sub> O + K <sub>2</sub> O	15.0 – 17.0	0.0 – 1.0
Fe <sub>2</sub> O <sub>3</sub>	-----	0.5
ZnO	0.0 – 0.5	-----

**Consumables / Additives** Starch crosslinkers and thickeners are used as consumables and/or additives in the coating as well as white pigments for the pigmented wall and ceiling coverings made of glass yarns.

**Material definitions Raw glass materials for manufacturing the mixture:**

**1. Sand**

Sand is a natural sediment rock with an SiO<sub>2</sub> content of approx. 99%.

**2. Kaolin**

Kaolin is a natural mineral which contains kaolinite, a hydro aluminium silicate comprising Al<sub>4</sub>(OH)<sub>8</sub>[Si<sub>4</sub>O<sub>10</sub>], as its main component. The exact composition depends on the respective deposit. Typically, the SiO<sub>2</sub> content is approx. 45-50% and the Al<sub>2</sub>O<sub>3</sub> content is approx. 35-40%. The percentage of colouring oxides (Fe<sub>2</sub>O<sub>3</sub> and TiO<sub>2</sub>) is usually less than 1.5%.

**3. Limestone**

Limestone refers to natural deposits of sediment rock largely comprising calcium carbonate CaCO<sub>3</sub>. The CaCO<sub>3</sub> content is usually > 95%.

**Glass:**

**1. C-glass:** Use as weft material

**2. E-glass:** Use as weft and warp material

**Coating:**

Comprising plastic dispersions made of modified potato starch and polymers dispersed in water, e.g. acrylate, polyvinyl acetate, EVA types.

**Harvesting raw materials and origin of materials**

**Glass:**

Comprising natural raw materials available all over the world and extracted in regional quarrying

**Coating:**

Modified potato starch is extracted from natural regenerative raw materials. The organic binders are largely extracted from crude oil.

The average transport distance for the raw materials used covers a radius of 500 km from the manufacturing chemical industry.



Product group: Glass wall and ceiling covering  
Declaration holder: Vitrolan Textile Glass GmbH  
Declaration number: EPD-VIT-2010111-E

Created  
01-10-2010

**Regional and general availability of raw materials**

○ **Resources:**

**Glass:**

Practically unlimited availability of natural mineral raw material deposits

**Coating:**

Potato starch: regenerative perennial raw material which is not susceptible to shortage

**Binders:**

Fossil deposits of raw materials are limited with the result that shortages can be anticipated in future.

○ **Recycling and secondary materials:**

**Glass:**

Uncoated waste glass materials are recycled and directed to the fleece manufacturing processes.

### 3 Product manufacture

**Product manufacture**

**Manufacturing textile glass yarns**

Electric furnaces are used to generate melted glass from a corresponding volume of mixed glass. Glass yarns can be manufactured in a direct process or via an intermediate product, so-called glass pellets.

Textile glass yarns are manufactured via the nozzle drawing process. During this drawing process, the melted glass is drawn from the trough base as thin elementary threads. This trough base is made of a platinum and rhodium alloy, and features several drill holes referred to as nozzles. The filaments emitted are received by a delivery roller and stripped at a speed of up to 3600 m/minute while being stretched to the desired filament diameter. The fibres are then cooled and sized. The glass filaments are directed across a picking roll which combines the individual filaments as glass fibre strands before winding them on a bobbin. These spools are then subjected to a drying process. The textile glass yarns are partially textured to give the fabric structure more volume.



Product group: Glass wall and ceiling covering  
Declaration holder: Vitrolan Textile Glass GmbH  
Declaration number: EPD-VIT-2010111-E

Created  
01-10-2010

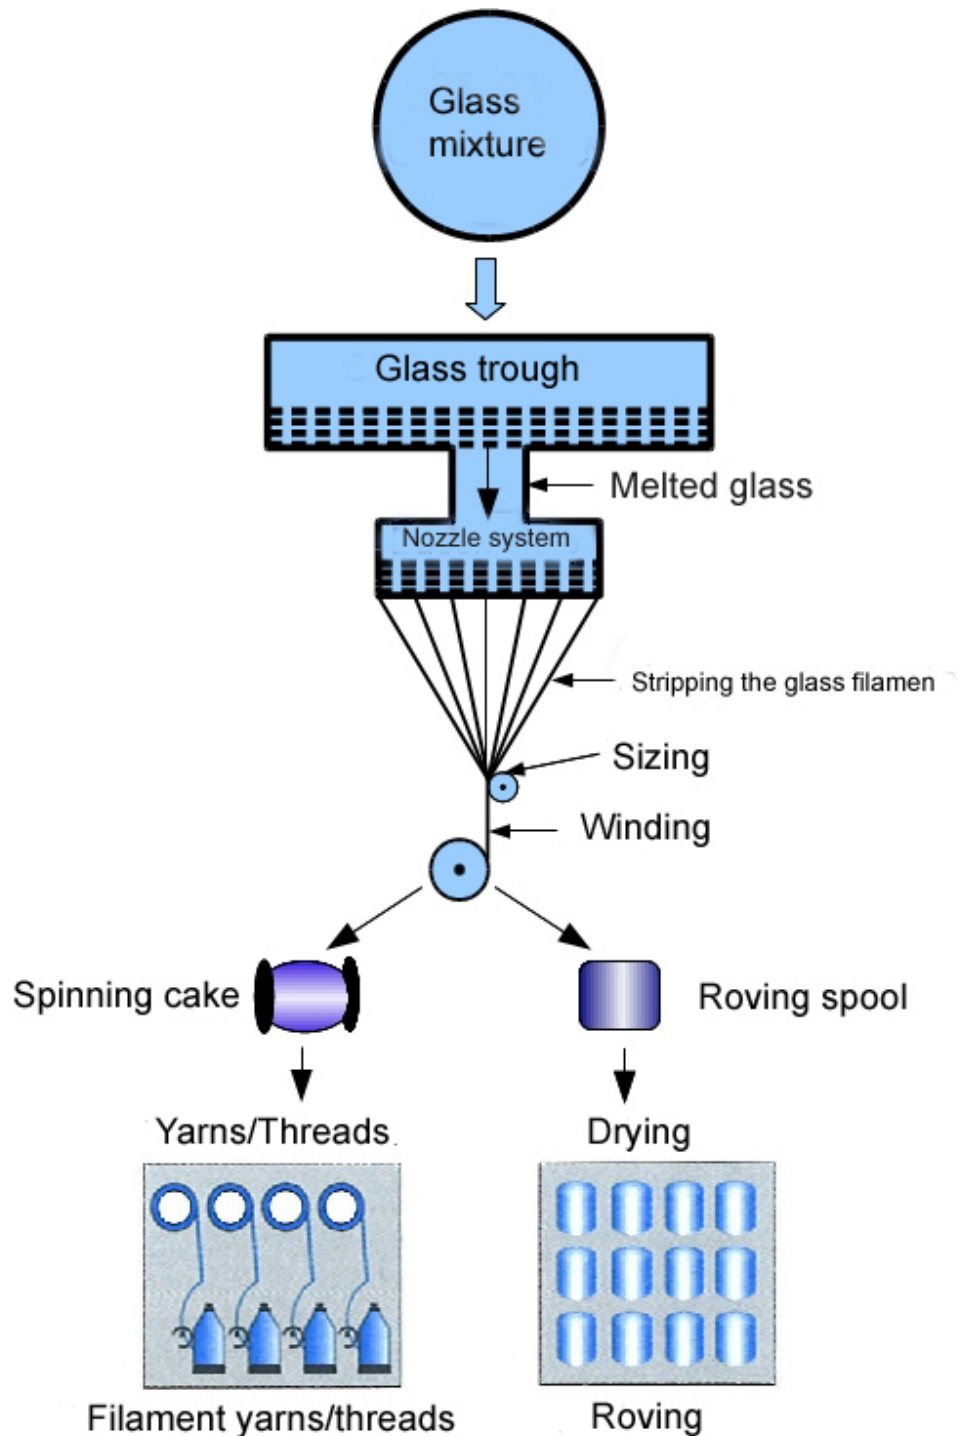


Fig. 1: Manufacturing textile yarns


**Product manufacture**

Warp beam manufacture involves attaching the textile glass yarns to fibre creels and combining as warp beams.



Product group: Glass wall and ceiling covering  
 Declaration holder: Vitrolan Textile Glass GmbH  
 Declaration number: EPD-VIT-2010111-E

Created  
 01-10-2010

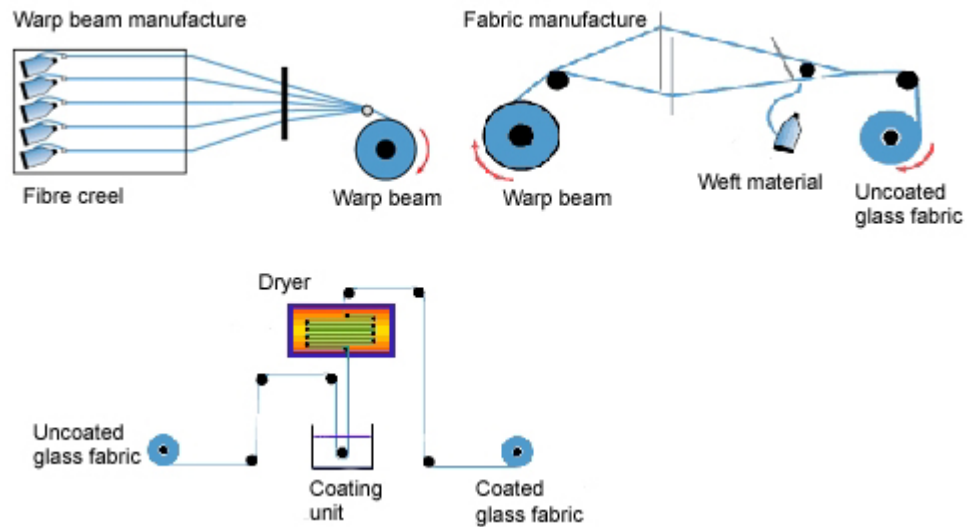

**Fig. 2: Manufacturing the warp beam and fabric, and coating the fabric**

In weaving, gripper needle and air-jet weaving looms generate textile glass fabric from the weft and warp materials. This is referred to a manufacturing fabric from glass yarns which are manufactured on weaving looms by means of crossing two thread systems.

These textile glass fabrics are attributed a non-slip coating using spray and silk screen printing machines and dried additionally using drying units.

In the packing area, the dried and coated fabric is wound and shortened in line with customer specifications.

In the packaging area, the picked wallpaper rolls are packaged individually before being sent for dispatch.

**Health protection in manufacturing**

In line with the Ordinance on Hazardous Substances, Annex IV, no. 22, no bio-persistent fibres or chemicals are used in the manufacturing and application process.

Furthermore, no bio-persistent fibres or chemicals are put into circulation in line with the Chemicals Prohibition Regulation, no. 23 in the Annex to § 1.

**Environmental protection in manufacturing**

The requisite statutory specifications are adhered to during the manufacturing process. Environmental pollution is reduced by managing production water within the circuit, for example.

**4 Product processing**

**Processing recommendations**

Depending on the product, the corresponding processing guidelines are included as inserts with the rolls as well as being described in brochures, safety data sheets and technical leaflets.

Important for all products:

Do not process under +8 °C. Only use the same product series number for adjacent areas (please refer to imprint on box). Add 5-10 cm when cutting lengths for walls/ceilings. Cut off excess paper.

1 (preparing the surface):

The surface must be dry, clean and dimensionally stable. Uneven surfaces must be smoothed. Finishing marks should be ≤ 1 mm. Absorbent surfaces should be pre-treated with suitable primers.





Product group: Glass wall and ceiling covering  
Declaration holder: Vitrulan Textile Glass GmbH  
Declaration number: EPD-VIT-2010111-E

Created  
01-10-2010

2 (application with adhesive):

A sufficient volume of the dispersion adhesive is applied to the wall consistently using a paint roller or airless spray device. The adhesive can also be applied directly to the wall and ceiling covering using a wallpapering machine. Observe the processing guidelines provided by the adhesive manufacturer. The drying time at normal room temperature (18 °C) is 24 hours.

3 (avoiding differences in structure):

Never apply the product upside down or back to front. The coloured markings on the back facilitate orientation. When glued, the markings on the back are 1 metre apart from one length to the next.

4 (butt joining):

The lengths must display good contact along the seams.

5 (pressing on and trimming):

Apply sufficient pressure using the wallpaper spatula to press any bubbles out of the fabric. Carefully press excess paper into the corner and trim along the edge of a wallpaper spatula or cutting ruler using a sharp-bladed cutter knife.

6 (coating):

1st coat: Apply the paint consistently once the product has fully dried and observe the processing guidelines provided by the manufacturer.

2nd coat: Do not apply until the 1st coat is fully dry.

*Unpigmented fabric:* at least 2 coats required

*Pigmented fabric:* at least 1 coat required

The exact volumes required depend on the fabric structure and surface, and should be established in a test on site.

**Industrial safety /  
Environmental  
protection**

The industrial safety measures outlined in the respective safety data sheets must be observed.

**Residual materials**

Indication of the waste key in accordance with the AVV (List of Wastes Ordinance)

Residual manufacturing material:

Commission communal facilities as regards recycling or disposal.

Waste key as per AVV:

040222: Waste from processed textile fibres

101103: Glass fibre waste

Residual materials / Packaging incurred by preliminary products:

Commission companies to recycle packaging materials.

Waste key as per AVV:

150101: Paper and cardboard

150102: Plastic packaging

150103: Wood

**Packaging**

Transport and sales packaging:

Commission companies to recycle packaging materials (e.g. Grüner Punkt, Interse-  
roh etc.) in accordance with the Packaging Directive.

Waste key as per AVV:

150101: Paper and cardboard

150102: Plastic packaging

150103: Wood



Product group: Glass wall and ceiling covering  
Declaration holder: Vitrulan Textile Glass GmbH  
Declaration number: EPD-VIT-2010111-E

Created  
01-10-2010

## 5 Condition of use

<b>Contents</b>	Coating contents are selected in line with the criteria of the Öko-Tex Standard 100 / Class 1 (Öko-Tex® Standard 100).
<b>Relationships between environment and health</b>	When wall and ceiling coverings made of glass yarns are used as designated, the emissions or otherwise release of harmful substances are below the detection limits. This is confirmed by external monitoring in accordance with the Öko-Tex standard 100 (please refer to section 9, Documentation).
<b>Useful life</b>	The useful life for wall and ceiling coverings made of glass yarns is similar to that of the entire building.

## 6 Extraordinary effects

<b>Fire</b>	<p>Of relevance for fire performance</p> <ul style="list-style-type: none"><li>• Building material class (EN DIN 13501-1:2007 (DIN EN 13501-1) or applicable national regulation):</li></ul> <p>Classification of all products in Class B-s1, d0 B (fire performance): very low contribution towards fire s1 (smoke development): 30 sec flame impingement; flame propagation ≤ 150 mm d0 (flaming droplets/particles): no flaming droplets/particles</p> <ul style="list-style-type: none"><li>• Testing toxic combustion gases as per DIN 53436 at 400 °C:</li></ul> <p>The flue gases can be assessed as harmless under the selected test conditions (see section 9, Documentation).</p>
<b>Water</b>	In the case of wall and ceiling coverings, unforeseen water impingement does not cause any water-polluting contents of verifiable volumes to be washed out (please refer to the Öko-Tex certificate in section 9, Documentation).

## 7 Re-use phase

<b>Re-use</b>	When the building is demolished, pure segregation of wall and ceiling coverings made of glass yarns is not possible from the remaining structure. All of the residual materials are regarded as building rubble.
<b>Further use</b>	Wall and ceiling coverings made of glass yarns can not be subjected to further use.
<b>Recycling</b>	Nor is recycling possible as pure segregation from the remaining structure is impossible.
<b>Further use</b>	<p>Uncoated residual materials comprising wall and ceiling coverings made of glass yarns are largely recycled.</p> <p>Coated residual materials comprising wall and ceiling coverings made of glass yarns are currently landfilled or directed to thermal recycling / disposal.</p>
<b>Disposal</b>	<p>The waste key number for production leftovers in the manufacture of wall and ceiling coverings made of glass yarns is 101103 (glass fibre waste).</p> <p>Non-recycled wall and ceiling coverings made of glass yarns can be disposed of as standard building rubble: Waste key 170904</p>



Product group: Glass wall and ceiling covering  
Declaration holder: Vitrolan Textile Glass GmbH  
Declaration number: EPD-VIT-2010111-E

Created  
01-10-2010

## 8 Life Cycle Assessment

### 8.1 Information on system definition and modelling the life cycle

<b>Declared unit</b>	The Declaration refers to 1 m <sup>2</sup> wall and ceiling covering with a grammage of 146 g/m <sup>2</sup> .
<b>System limits</b>	<p>For manufacturing, the system limits concern extraction of the raw material to delivery of the product ready for shipping, i.e. cradle to gate. Transport to the site has not been included in calculating the Life Cycle Assessment and requires supplementing. Apart from the manufacture of preliminary products for glass production, manufacturing of the product also includes manufacture of the raw materials used for coating the glass fabric.</p> <p>The following individual processes have been included:</p> <ul style="list-style-type: none"><li>- Provision processes concerning preliminary products and energy</li><li>- Manufacturing processes for wall and ceiling coverings made of glass yarns</li><li>- Transporting the raw materials to the plant</li><li>- Packaging and disposal thereof</li></ul> <p>The usage and disposal stages of wall and ceiling coverings made of glass yarns have not been taken into consideration in this study and need to be supplemented for assessment within the context of the building.</p>
<b>Assumptions and estimates</b>	Production and the ensuing effects associated with the environment were estimated by means of literary research as regards starch modification as modified starch accounts for a considerable share of the product (Ullmanns 2008). Primary data was recorded for the remaining data or secondary data already available from the GABI 4 data bank used.
<b>Cut-off criteria</b>	<p>All operating data, i.e. all of the starting materials used, thermal energy, internal fuel consumption and electricity consumption, all direct production waste as well as all emission measurements available were taken into consideration in the Assessment. Assumptions were made as regards the transport expenses associated with all input and output data taken into consideration. Accordingly, material and energy flows with a share of less than 1 per cent were also considered.</p> <p>It can be assumed that the total of all neglected processes does not exceed 5% in the effective categories.</p> <p>Machinery and plants required in the manufacturing process are neglected.</p>
<b>Transport</b>	<p>All transports of raw materials and consumables used were taken into consideration in the Assessment.</p> <p>The average transport distance for the distribution chain in Germany (plant to site) has not been taken into consideration in the Life Cycle Assessment. According to the manufacturer, it is 411 km.</p>
<b>Period under review</b>	The primary data used refers to production year 2009.
<b>Background data</b>	<p>GaBi 4 2009 – the software system for comprehensive analysis developed by PE INTERNATIONAL (GaBi 4) – was used for modelling the life cycle for the manufacture of wall and ceiling coverings made of glass yarns. The data items contained in the GaBi data base are documented in the online GaBi documentation. The basic data in the GaBi data base was applied for energy, transport and consumables.</p> <p>The Life Cycle Assessments for the plant in Germany under review have been drawn up for Germany. This means that apart from the production processes under these marginal conditions, the pre-stages also of relevance for Germany such as provision of electricity or energy carriers were used.</p>



Product group: Glass wall and ceiling covering  
 Declaration holder: Vitrulan Textile Glass GmbH  
 Declaration number: EPD-VIT-2010111-E

Created  
 01-10-2010

**Data quality**

GaBi 4 2009 – the software system for comprehensive analysis developed by PE International (GaBi 4) – was used for modelling the life cycle for the manufacture of wall and ceiling coverings made of glass yarns. All of the background data records of relevance for manufacturing wall and ceiling coverings made of glass yarns were taken from the GaBi 4 software data base. The data used was last revised less than 8 years ago.

In addition to the primary data relating to production of wall and ceiling coverings made of glass yarns at Vitrulan Textile Glass GmbH, primary data on the manufacture of glass threads was also recorded among the suppliers (textured textile glass; please refer to the flow chart). The requisite background data on the raw materials used was modelled specifically or taken from the GaBi data base. Modelling the glass threads used as weft material was on the basis of a supplier recipe with an estimate as regards energy consumption and emission calculations.

The data on the provision of preliminary products for coating was taken from the GaBi data base. Estimates were made based on literary research as regards modification of starch.

**Allocation**

Where necessary, plant data was allocated quantitatively.

**Thermal recycling of waste and packaging**

As regards thermal recycling of packaging, the energy obtained as electricity and/or thermal energy from natural gas is allocated to Germany as the point of reference and assigned to the life cycle section of manufacturing in terms of definition.

**8.2 Depicting the analyses and evaluations**

The following section depicts the life cycle inventory analysis in terms of material and energy resources as well as waste incurred.

**Primary energy**

One square metre of wall and ceiling coverings made of glass yarns complies with non-regenerative primary energy consumption of 11.26 MJ/m<sup>2</sup>.

Apart from the share of regenerative energy from electricity or thermal energy, the percentage of regenerative primary energy amounting to 0.82 MJ/m<sup>2</sup> is also attributable to solar energy (see Fig. 5) which is absorbed by the starch.

**Table 3: Primary energy consumption**

Primary energy	Unit	Volume
Non-regenerative primary energy	[MJ]	11.26
Regenerative primary energy	[MJ]	0.82

The largest share of primary energy consumption is accounted for by the raw materials for manufacturing the glass threads/yarns. On account of their mineral origin and the share of waste glass, the raw materials used for glass manufacture have a relatively low effect but glass manufacture is energy-intensive owing to the melting process which in turn has a significant effect on the consumption of primary energy.

Although the percentage of glass accounts for a higher share of the product in terms of volume, manufacture of the raw materials for coating makes practically the same contribution to primary energy consumption. It must however be mentioned at this stage that apart from starch as a natural raw material, polymers of organic origin are also used for the coating which has a considerable effect on primary energy consumption.



Product group: Glass wall and ceiling covering  
Declaration holder: Vitrolan Textile Glass GmbH  
Declaration number: EPD-VIT-2010111-E

Created  
01-10-2010

At 28.5%, production in the plant in Marktschorgast displays the third largest share of primary energy consumption necessitated in particular by the fabric coating process which accounts for high levels of electricity and thermal energy consumption. Transport (1.1%) and packaging (0.6%) only have a minor effect on primary energy consumption.

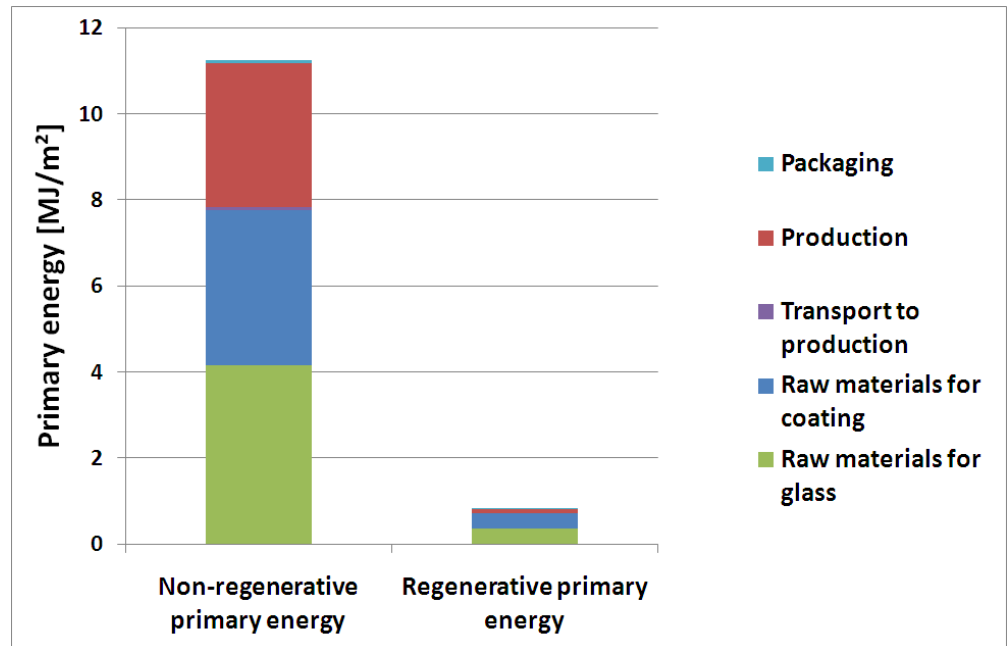


Fig. 3: Primary energy consumption


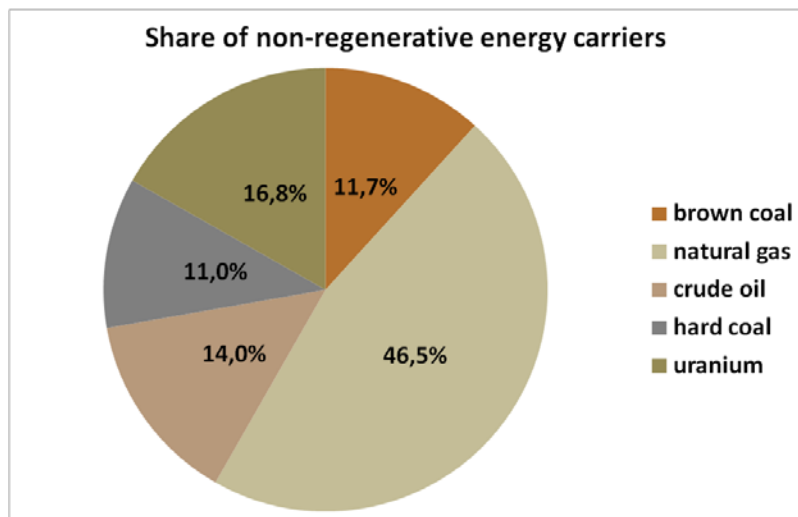


Fig. 4: Share of non-regenerative primary energy carriers



Product group: Glass wall and ceiling covering  
 Declaration holder: Vitrolan Textile Glass GmbH  
 Declaration number: EPD-VIT-2010111-E

Created  
 01-10-2010

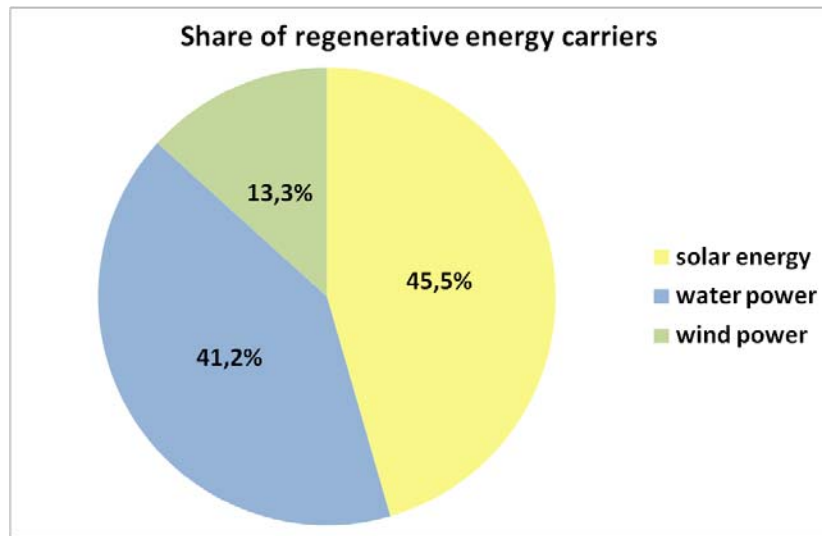

**Fig. 5: Share of regenerative primary energy carriers**

**Water requirements**

The water consumption for manufacturing 1 m<sup>2</sup> of wall and ceiling coverings made of glass yarns including the upstream chain complies with 6.58 litres.

A major percentage of this is accounted for by the fabric coating as the glaze displays a water content of approx. 80%. Just under 10% of the water is added in Marktschorgast.

**Waste**

The following table depicts the waste volumes incurred in the manufacture of 1 m<sup>2</sup> of wall and ceiling coverings made of glass yarns:

Mining waste represents the largest share of pile waste which is primarily attributable to the production of electric energy.

Special waste is incurred primarily during upstream manufacture of raw materials. Radioactive waste is exclusively incurred in generating electricity in nuclear power plants.

**Table 4: Waste**

Waste	Unit	Volume
Mining waste / Pile waste	[kg]	1.86E+00
Commercial waste similar to domestic waste	[kg]	2.98E-03
Special waste	[kg]	9.60E-04
Radioactive waste	[kg]	6.68E-04

**Estimated impact**

The distribution already referred to is also repeated in the effects on the five effect categories reviewed: The raw materials used also make a significant contribution towards all of the effect categories.

The global warming potential (GWP) is mainly influenced by the glass but also production of the actual coating. This is attributable to the glass manufacturing process on the one hand where melting causes carbon dioxide to evaporate from the limestone. The effects of energy consumption arise during production. The GWP is posi-



Product group: Glass wall and ceiling covering  
Declaration holder: Vitrulan Textile Glass GmbH  
Declaration number: EPD-VIT-2010111-E

Created  
01-10-2010

tively influenced by the input of carbon dioxide to starch during growth.

In terms of the ozone depletion potential, production and glass have rather similar effects. The ODP is primarily influenced by the provision of energy.

The acidification potential (AP) however displays an entirely different picture: the maximum influence is displayed by coating raw materials (especially by titanium dioxide).

Once again, the overfertilisation potential (NP) is heavily influenced by the materials used (for glass and adhesive). One reason for this involves starch as it is fertilised during growth. The percentage of NP for glass is attributable to energy consumption.


The photochemical ozone creation potential (POCP) is largely caused by the base materials used – and therefore primarily attributable to energy consumption.

Transporting the raw materials to the production facility in Marktschorgast and product packaging only play a subordinate role.

**Table 5: Effect categories**

Effect categories	Unit	Volume
GWP	[kg CO <sub>2</sub> equiv.]	6.46E-01
ODP	[kg R11 equiv.]	5.07E-08
AP	[kg SO <sub>2</sub> equiv.]	3.59E-03
NP	[kg PO <sub>4</sub> equiv.]	1.92E-04
POCP	[kg ethene equiv.]	1.67E-04

The shares of the various sections are visualised in relative terms in the following graphic.

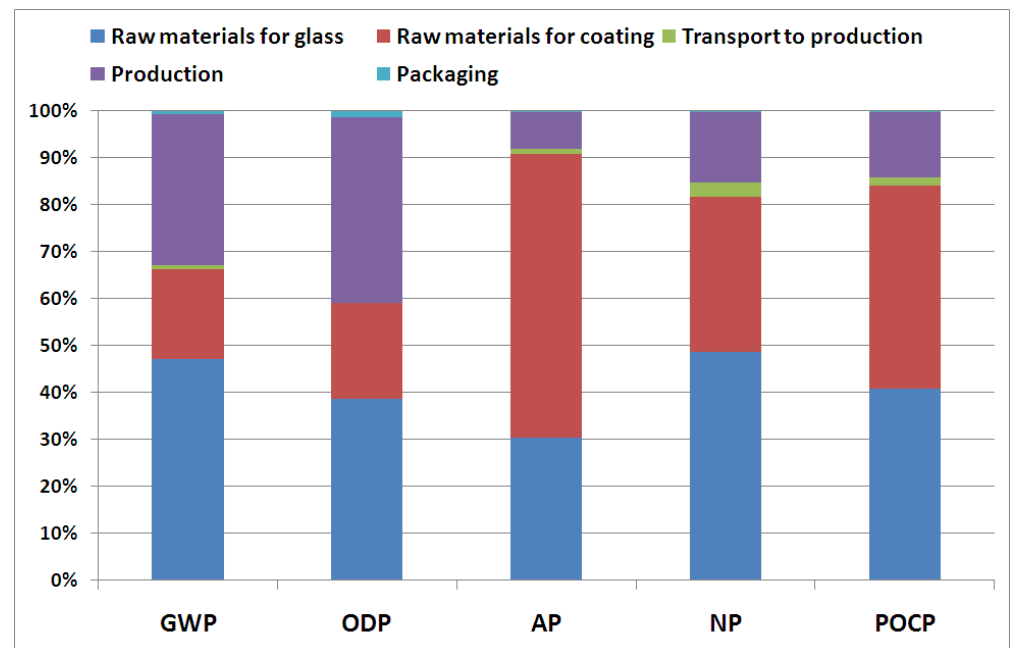

**Fig. 6: Relative contributions of effective categories**



Product group: Glass wall and ceiling covering  
 Declaration holder: Vitrolan Textile Glass GmbH  
 Declaration number: EPD-VIT-2010111-E

Created  
 01-10-2010

## 9 Requisite evidence

- 9.1 Pollutant test** **Measuring agency:** Hohenstein Textile Testing Institute GmbH & Co.KG, Hohenstein  
**Test reports, date:** 10.0.74686, 22 March 2010 (=03.0.8293 ZV7)  
**Result:** Certification in accordance with Öko-Tex Standard 100, confirmation of confidence in textiles – Textiles for product class i (products for babies) tested for pollutants

**Table 6: Results of the Öko-Tex Standard 100**

Test	Result
pH value	< 7
Formaldehyde	n.n.
Phenols	n.n.
Extractable heavy metals and heavy metals	Product class I
Odour	n.n.

- 9.2 Testing toxic combustion gases** **Measuring agency:** Elektro-Physik Aachen GmbH (epa Aachen), Aachen  
**Test reports, date:** 7/2010, 25 January 2010  
**Result:** Confirmation of toxicological safety of combustion gases in accordance with DIN 53436 at 400 °C  
 “The flue gases pertaining to the tested material can be assessed as harmless under the selected test conditions.”

## 10 PCR document and examination

This declaration is based on the PCR “Glass wall and ceiling coverings” document, 2010-04.

Review of the PCR document by the Expert Committee. Chairman of the Expert Committee: Prof. Dr.-Ing. Hans-Wolf Reinhardt (University of Stuttgart, IWB)
Independent examination of the Declaration in accordance with ISO 14025: <input type="checkbox"/> internal <input checked="" type="checkbox"/> external
Validation of the Declaration: Dr. Frank Werner





Product group: Glass wall and ceiling covering  
Declaration holder: Vitrolan Textile Glass GmbH  
Declaration number: EPD-VIT-2010111-E

Created  
01-10-2010

## 11 Literature

- ULLMANNS 2008** J.R. Daniel et al. (2008): Starch. Published by Wiley-VCH Verlag GmbH & Co. KGaA, from Ullmann's Encyclopaedia of Industrial Chemistry (Online Library) on 29.06.2010
- Institut Bauen und Umwelt** Guidelines on formulating the product-specific requirements of the Environmental Product Declarations (Type III) for building products, [www.bau-umwelt.com](http://www.bau-umwelt.com)
- GaBi 4 2009** GaBi 4: Software and data base for comprehensive analysis. LBP, University of Stuttgart and PE International, 2001-2009.
- Öko-Tex® Standard 100** Öko-Tex Standard 100 (test and certification system for textile raw, intermediate and end products):  
[http://www.oeko-tex.com/OekoTex100\\_PUBLIC/content5.asp?area=hauptmenue&site=oekotexstandard100&cls=01](http://www.oeko-tex.com/OekoTex100_PUBLIC/content5.asp?area=hauptmenue&site=oekotexstandard100&cls=01)
- PCR 2010** PCR glass wall and ceiling coating, Institut Bauen und Umwelt e.V., version 04/2010
- Standards and legislation**
- ISO 9001** ISO 9001, Quality Management Systems – Requirements; version in 3 languages DIN EN ISO 9001:2008
- DIN EN 13501-1** DIN EN 13501-1, Classification of Building Products and Methods by Fire Performance – Part 1: Classification with the results of tests on fire performance by building products; German version EN 13501-1:2007 + A1:2009
- ISO 13934-1** ISO 13934-1, Textiles – Tensile properties of fabrics – Part 1: Determination of maximum force and elongation at maximum force using the strip method; German version EN ISO 13934-1:1999
- ISO 14025** ISO 14025:2007-10, Environmental Designations and Declarations – Type III Environmental Declarations – Basic Principles and Processes (ISO 14025:2006); German and English versions
- ISO 14040** ISO 14040:2006-10, Environment Management – Life Cycle Assessment – Basic Principles and Framework Conditions (ISO 14040:2006); German and English versions EN ISO 14040:2006
- ISO 14044** ISO 14044:2006-10, Environment Management – Life Cycle Assessment – Requirements and Instructions (ISO 14044:2006); German and English versions EN ISO 14044:2006



Institut Bauen  
und Umwelt e.V.

**Publisher:**

Institute Construction and Environment e.V. (IBU)  
Rheinufer 108  
53639 Königswinter  
Tel.: +49 (0)2223 296679-0  
Fax: +49 (0)2223 296679-1  
E-mail: [info@bau-umwelt.com](mailto:info@bau-umwelt.com)  
Internet: [www.bau-umwelt.com](http://www.bau-umwelt.com)

**Layout:**

PE INTERNATIONAL

**Photo credits:**

Vitrulan Textile Glass GmbH, 95509 Marktschorgast, Germany

**Vitrulan Textile Glass GmbH**

Bernecker Str. 8  
D-95509 Marktschorgast  
Tel.: +49 (0)9227 77-0  
Fax: +49 (0)9227 77-700  
E-mail: [textile-glass@vitrulan.com](mailto:textile-glass@vitrulan.com)  
Internet: [www.vitrulan.com](http://www.vitrulan.com)



**Environmental Product Declaration**  
**Wall and ceiling coverings made of glass fibres**

Page 19

---

Product group: Glass wall and ceiling covering  
Declaration holder: Vitruvan Textile Glass GmbH  
Declaration number: EPD-VIT-2010111-E

---

Created  
01-10-2010

**This is to certify that this English translation is a true translation of the German original submitted to me: Theley, Federal Republic of Germany, 17 January 2011**

---

**Marius J. Schütz:**

**Sworn Translator for the Courts and Notaries of the Saarland Judicial District,  
Saarbrücken, Federal Republic of Germany**